

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 939 359 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.09.1999 Bulletin 1999/35

(51) Int. Cl.⁶: G06F 3/06

(21) Application number: 98115108.7

(22) Date of filing: 11.08.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 26.02.1998 US 31504

(71) Applicant:
Hewlett-Packard Company
Palo Alto, California 94304 (US)

(72) Inventors:
• Hodges, Mark E.
Boise, ID 83706 (US)
• Ockerse, Harold C.
Boise, ID 83706 (US)
• Vaughn, Gregory A.
Meridian, ID 83642 (US)

(74) Representative:
Schoppe, Fritz, Dipl.-Ing.
Schoppe & Zimmermann
Patentanwälte
Postfach 71 08 67
81458 München (DE)

(54) Dynamic ram disk

(57) A system and method dynamically allocate memory (30) to a RAM disk (40). Upon a file transfer to the RAM disk (40), a device driver determines an amount of memory (30) required by the RAM disk (40) then requests the required amount of memory (30) from a memory manager (25). As files are deleted from the RAM disk (40), the memory (30) is released from the RAM disk (40) by informing the memory manager (25)

of the addresses of the memory (30) to be released. Sector freelist tracks each cluster of memory (30) allocated to the RAM disk (40). When a sector becomes inactive, a corresponding bit in a sector freelist indicates the inactive status of the sector. When all of the sectors in a cluster are inactive, the cluster is released for the RAM disk (40).

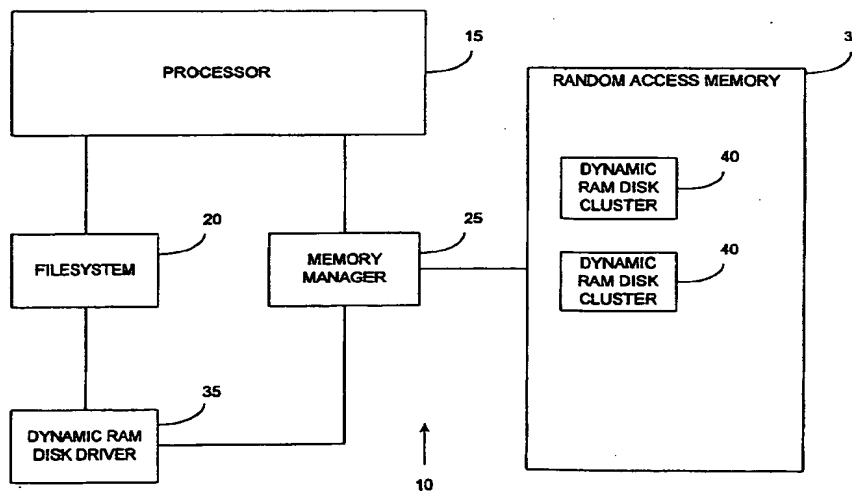


FIG. 1

EP 0 939 359 A2

Description

FIELD OF THE INVENTION

[0001] This invention relates in general to memory storage devices and, more particularly, to simulating a physical storage device using random access memory.

BACKGROUND OF THE INVENTION

[0002] Static (conventional) RAM disks have been in use in computing devices for some time. A RAM disk is random access memory (RAM) that has been configured to simulate a disk drive. Files are accessed on a RAM disk just as they are on a physical disk. RAM disks are also known as RAM drives, virtual disks, and virtual drives.

[0003] Static RAM disks must be configured at system startup. After startup, the configuration of the static RAM disk cannot be changed. Once RAM has been allocated to a static RAM disk, it cannot be used by the system for processing. The memory allocated to the static RAM disk may only be used by the static RAM disk.

[0004] Additionally, static RAM disks require the user to configure the amount of memory that will be set aside for data storage. In many environments this makes the static RAM disk difficult to use, and requires frequent reconfiguration depending on changing patterns of system use.

SUMMARY OF THE INVENTION

[0005] According to principles of the present invention in a preferred embodiment, a system and method dynamically allocate memory to a RAM disk. Upon a file transfer to the RAM disk, a device driver determines an amount of memory required by the RAM disk, then requests the required amount of memory from a memory manager. As files are deleted from the RAM disk, the memory is released from the RAM disk by informing the memory manager of the addresses of the memory to be released.

[0006] According to further principles of the present invention in a preferred embodiment, data is written to the RAM disk in fixed increments called sectors. Sectors are grouped together to form clusters. The number of sectors in a cluster is dependent on the memory manager. A freelist is a bit map used to monitor the status of each sector of a cluster. When a sector becomes inactive, a corresponding bit in a sector freelist indicates the inactive status of the sector. When all of the sectors in a cluster are inactive, the cluster is released from the RAM disk.

[0007] Other objects, advantages, and capabilities of the present invention will become more apparent as the description proceeds.

DESCRIPTION OF THE DRAWINGS

[0008]

Figure 1 is a block diagram of a memory management system.

Figure 2 is a flow chart showing a preferred embodiment of the present invention for dynamically allocating memory to a RAM disk.

Figure 3 is a flow chart showing a preferred embodiment of the present invention for dynamically releasing memory from a RAM disk.

DETAILED DESCRIPTION OF THE INVENTION

[0009] Figure 1 shows a memory management system 10 used in the present invention. A processor 15 communicates with a filesystem 20 and a memory manager 25. Memory manager 25 allocates random access memory (RAM) 30 between processor 15 and filesystem 20. Dynamic RAM disk device driver 35 communicates with filesystem 20 and memory manager 25 to construct and maintain dynamic RAM disk 40. Dynamic RAM disk 40 is formed from clusters of RAM 30. Dynamic RAM clusters 40 need not be contiguous in RAM 30.

[0010] Dynamic RAM disk 40 operates by allocating system memory 30 to accommodate the storage of data by filesystem 20. Subsequent calls from filesystem 20 to read or write data result in information being copied between filesystem 20 buffers and dynamic RAM disk 40 memory space. The address in dynamic RAM disk 40 memory space is computed based on a cluster and sector offset scheme.

[0011] Filesystem 20 operates on logical blocks. Dynamic RAM disk 40 maps logical blocks to physical clusters and sectors by dividing the logical block value by the number of sectors per cluster. In a typical application, the number of sectors per cluster is 16. The integer value of the quotient is the number of the physical cluster and the remainder is the number of the physical sector.

[0012] Dynamic RAM disk 40 allocates memory 30 as needed to store data, leaving more memory available to other subsystems for use. As files are deleted from filesystem 20, dynamic RAM disk 40 is informed of sectors that are discarded. When all of the sectors in a cluster have been discarded, the cluster is released and memory 30 is returned to the system.

[0013] Sectors are marked as active or inactive using a sector freelist. The sector freelist is an array of bits, where each bit corresponds to a sector in the associated cluster. If a bit in the freelist is set, the corresponding sector is active. When all bits in the freelist are clear, the associated cluster may be safely deallocated and returned to the system for other uses. Where supported by memory manager 25, each cluster may be relocated to reduce fragmentation problems in systems where

there is a high frequency of file creation and deletion.

[0014] Filesystem 20 expects to operate on a device having a fixed capacity. In order to provide filesystem 20 with a fixed value, dynamic RAM disk 40 always reports a capacity to filesystem 20 that it is as large as memory 30 and the system configuration will allow. Should allocation of a new cluster fail when reported capacity is greater than actual capacity, Dynamic RAM disk 40 indicates a disk-full condition to filesystem 20. In some environments, this disk-full condition requires special handling by filesystem 20.

[0015] Processor 15 performs a write or read operation using filesystem 20. Filesystem 20 carries out the operation by requesting a read or write of dynamic RAM disk device driver 35. Figure 2 shows the operation of device driver 35 for a write or read operation. For each logical sector to be written, a physical cluster and sector are computed 45. A check is then made to determine 50 whether the computed cluster is already resident in RAM disk 40. If not, a new cluster is allocated 55 from system memory 30. Device driver 35 makes a request to memory manager 25 for a new cluster. Memory manager 25 then provides device driver 35 with the address of the new cluster to be added to RAM disk 40.

[0016] Once computed cluster is resident in RAM disk 40, the computed sector in which the data is to be written is marked 60 as active in the sector freelist. The data is then written 65 to RAM disk 40.

[0017] Figure 3 shows the operation of device driver 35 when data is discarded. For each logical cluster to be discarded, a physical cluster and sector are computed 70. The computed sector is then marked 75 inactive on the sector freelist. A check is then made to determine 80 whether all of the sectors in the freelist for the computed cluster are inactive. If all of the sectors are inactive, the computed cluster is deallocated 85 from RAM disk 40. Device driver 35 reports the address of the deallocated cluster to memory manager 25. The deallocated cluster then becomes available for other system uses.

[0018] One application for dynamic RAM disk 40 is in printers. Many multiple original print (mopy) printers require a storage medium and filesystem in order to properly perform the electronic collation functions. Existing mopy printers (mopiers) require the installation of an expensive hard disk. Dynamic RAM disk 40 allows mopy technology in printers that do not have hard disks. Dynamic RAM disk 40 allows printer-resident forms, fonts, and macros to be managed the same way as in printers equipped with hard disks.

[0019] Dynamic RAM disk 40 allows print jobs to be retained and easily administered in a printer. Since Dynamic RAM disk 40 size depends only on the quantity of data stored, job retention incurs a very low cost in terms of system resources. Since dynamic RAM disk 40 is presented to the user as a familiar file storage medium, the management of retained jobs is much easier than it might be if using some other memory-based approach.

[0020] In summary, what has been described above are the preferred embodiments for a system and method for dynamically allocating memory to a RAM disk. While the present invention has been described by reference to specific embodiments, it will be obvious that other alternative embodiments and methods of implementation or modification may be employed without departing from the true spirit and scope of the invention.

Claims

1. A device driver (35) for dynamically allocating memory (30) to a RAM disk (40), the device driver comprising:

- (a) means for determining an amount of memory (30) required by the RAM disk (40);
- (b) means for allocating the required amount of memory (30) to the RAM disk (40);
- (c) means for determining whether allocated memory (30) is in use by the RAM disk (40); and,
- (d) means for releasing memory (30) not in use by the RAM disk (40).

2. The device driver (35) of claim 1 wherein the means for determining the required amount of memory (30) includes:

- (a) means for determining an amount of unused memory (30) allocated to the RAM disk (40);
- (b) means for determining a file size of a file to be stored in the RAM disk (40); and,
- (c) means for calculating the required amount of memory (30) from the amount of unused memory (30) and the file size.

3. The device driver (35) of claim 1 wherein the means for allocating the required amount of memory (30) includes:

- (a) a memory manager (25); and,
- (b) means for requesting from the memory manager (25) the required amount of memory.

4. The device driver (35) of claim 1 wherein the means for determining whether allocated memory (30) is in use includes:

- (a) a freelist for tracking the inactivity of each unit of memory (30) allocated to the RAM disk (40);
- (b) means for informing the freelist as each unit of memory (30) allocated to the RAM disk (40) becomes inactive.

5. The device driver (35) of claim 4 wherein the freelist includes an array of bits, wherein each bit corresponds to a unit of the memory (30) allocated to the RAM disk (40), and wherein each bit is marked inactive as each corresponding unit of the memory (30) becomes inactive. 5
6. The device driver (35) of claim 1 wherein the means for releasing memory (30) includes: 10
- (a) a memory manager (25); and
 - (b) means for informing the memory manager (25) of addresses of memory (30) to be released. 15
7. A method for dynamically allocating memory (30) to a RAM disk (40), the method comprising:
- (a) determining an amount of memory (30) required by the RAM disk (40); 20
 - (b) allocating the required amount of memory (30) to the RAM disk (40);
 - (c) determining whether allocated memory (30) is in use by the RAM disk (40); and,
 - (d) releasing memory (30) not in use by the RAM disk (40). 25
8. The method of claim 7 wherein determining the required amount of memory (30) includes: 30
- (a) determining an amount of unused memory (30) allocated to the RAM disk (40);
 - (b) determining a file size of a file to be stored in the RAM disk (40); and,
 - (c) calculating the required amount of memory (30) from the amount of unused memory (30) and the file size. 35
9. The method of claim 7 wherein determining whether allocated memory (30) is in use includes: 40
- (a) tracking the inactivity of each unit of memory (30) allocated to the RAM disk (40) with a freelist;
 - (b) informing the freelist as each unit of memory (30) allocated to the RAM disk (40) becomes inactive. 45
10. The method of claim 9 wherein tracking the inactivity of each unit includes: 50
- (a) providing an array of bits, wherein each bit corresponds to a unit of the memory (30) allocated to the RAM disk (40); and,
 - (b) marking each bit inactive as each corresponding unit of the memory (30) becomes inactive. 55

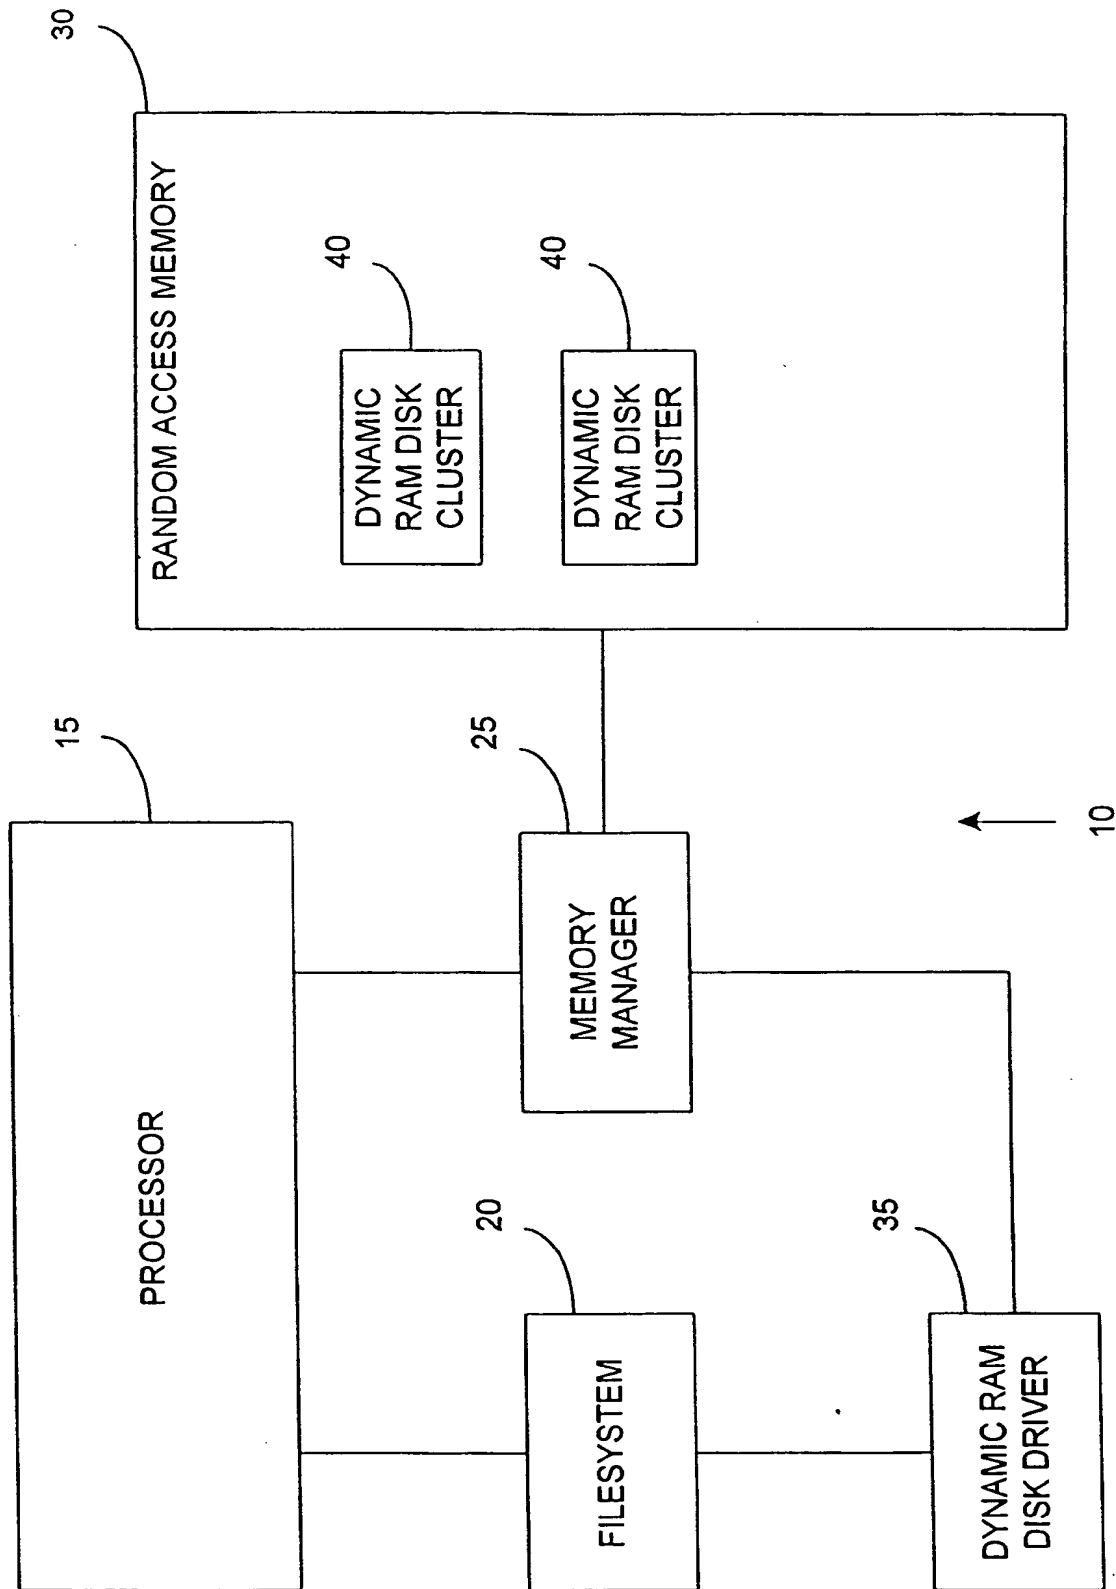


FIG. 1

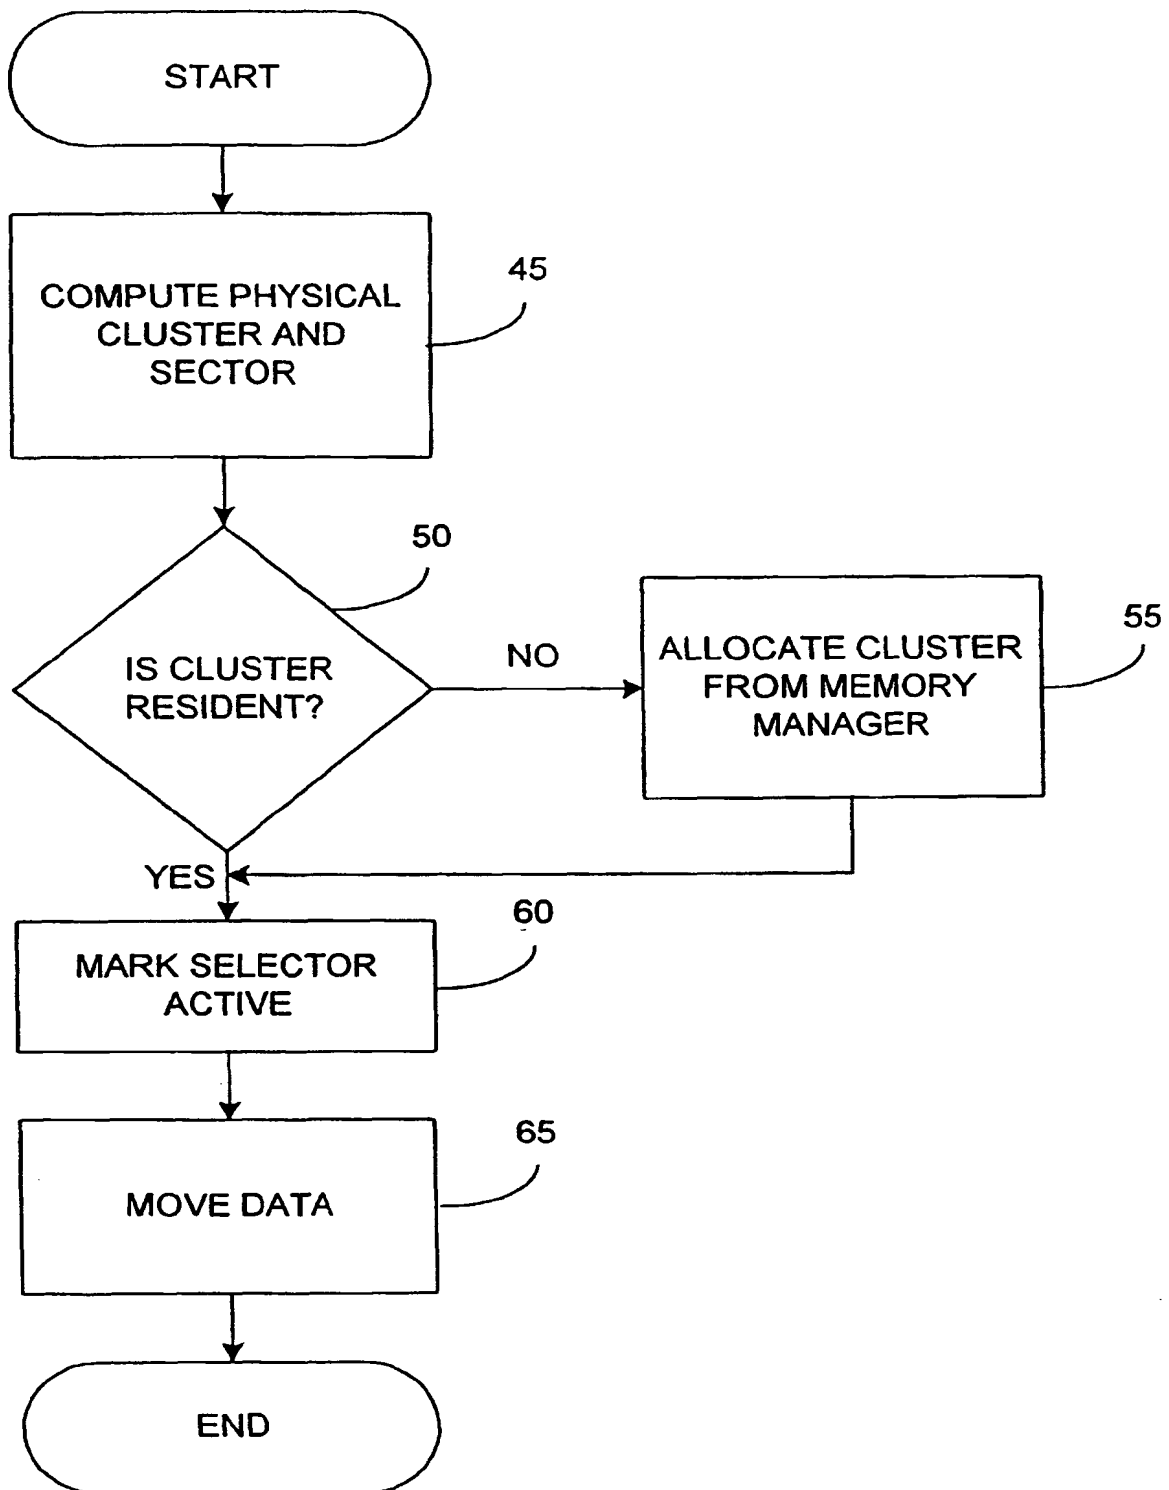


FIG. 2


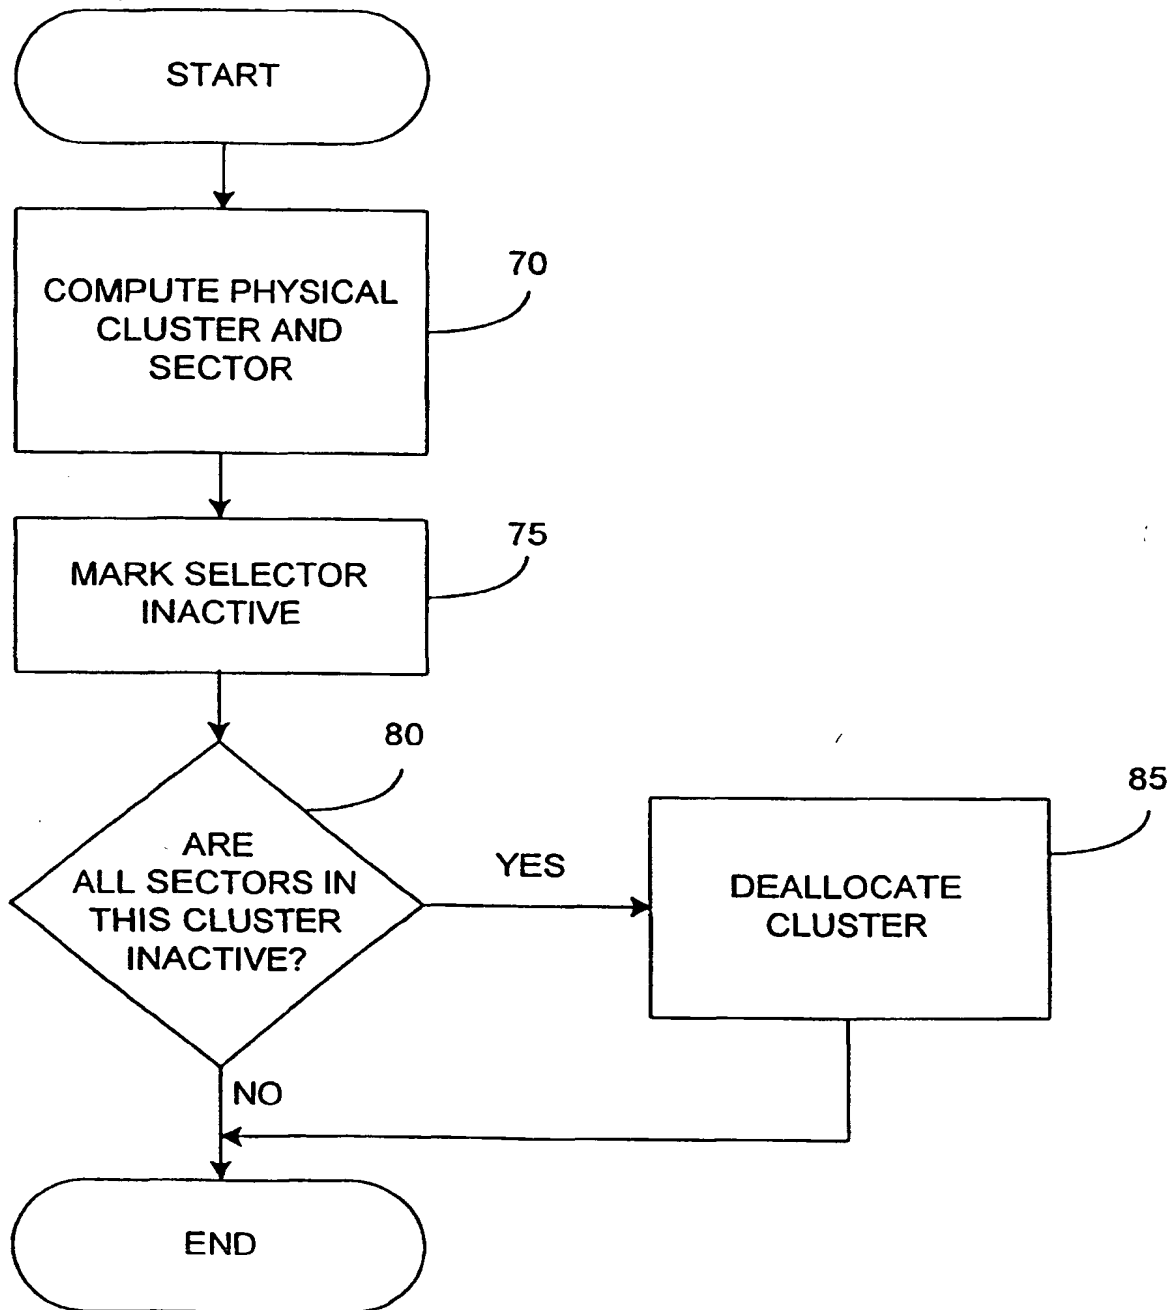


FIG. 3

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 939 359 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
23.04.2003 Bulletin 2003/17

(51) Int Cl.7: **G06F 3/06, G06F 12/02**

(43) Date of publication A2:
01.09.1999 Bulletin 1999/35

(21) Application number: **98115108.7**

(22) Date of filing: **11.08.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Hodges, Mark E.**
Boise, ID 83706 (US)
• **Ockerse, Harold C.**
Boise, ID 83706 (US)
• **Vaughn, Gregory A.**
Meridian, ID 83642 (US)

(30) Priority: **26.02.1998 US 31504**

(71) Applicant: **Hewlett-Packard Company,**
A Delaware Corporation
Palo Alto, CA 94304 (US)

(74) Representative: **Schoppe, Fritz, Dipl.-Ing.**
Schoppe, Zimmermann, Stöckeler & Zinkler
Patentanwälte
Postfach 71 08 67
81458 München (DE)

(54) **Dynamic ram disk**

(57) A system and method dynamically allocate memory (30) to a RAM disk (40). Upon a file transfer to the RAM disk (40), a device driver determines an amount of memory (30) required by the RAM disk (40) then requests the required amount of memory (30) from a memory manager (25). As files are deleted from the RAM disk (40), the memory (30) is released from the

RAM disk (40) by informing the memory manager (25) of the addresses of the memory (30) to be released. Sector freelists tracks each cluster of memory (30) allocated to the RAM disk (40). When a sector becomes inactive, a corresponding bit in a sector freelist indicates the inactive status of the sector. When all of the sectors in a cluster are inactive, the cluster is released for the RAM disk (40).

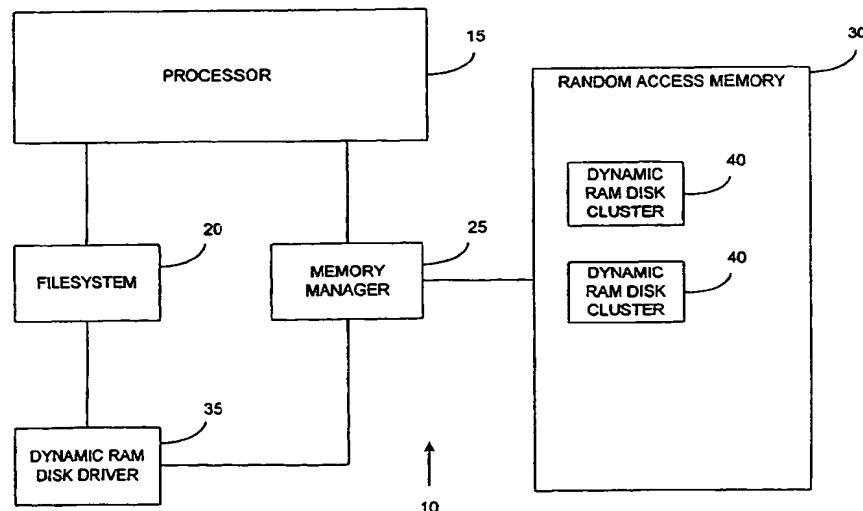


FIG. 1

EP 0 939 359 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 11 5108

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	MARKO KOTHALA: "SRDISK (TM) ReSizeable RAMDisk version 2.08 for XMS and EMS memory" -, [Online] XP002230570 Retrieved from the Internet: <URL:http://www.simtel.net/pub/pd/49250.htm> [retrieved on 2003-02-11] * the whole document *	1,2,7,8	G06F3/06 G06F12/02
Y	---	3-6,9,10	
Y	US 5 675 769 A (RUFF ERIC J ET AL) 7 October 1997 (1997-10-07) * column 17, line 21 - line 26 * * column 16, line 27 - line 37 * -----	3-6,9,10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06F
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 12 February 2003	Examiner Van de Maele, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.82) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 5108

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-02-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5675769	A	07-10-1997	AT 208923 T 15-11-2001
		AU 4986196 A 11-09-1996	
		DE 19681257 T0 26-02-1998	
		DE 69616987 D1 20-12-2001	
		DE 69616987 T2 18-04-2002	
		EP 0811196 A1 10-12-1997	
		JP 10512379 T 24-11-1998	
		US 6088778 A 11-07-2000	
		WO 9626487 A1 29-08-1996	
		US 5706472 A 06-01-1998	
		US 5930831 A 27-07-1999	
		US 6178487 B1 23-01-2001	
		US 6108759 A 22-08-2000	

THIS PAGE BLANK (USPTO)